
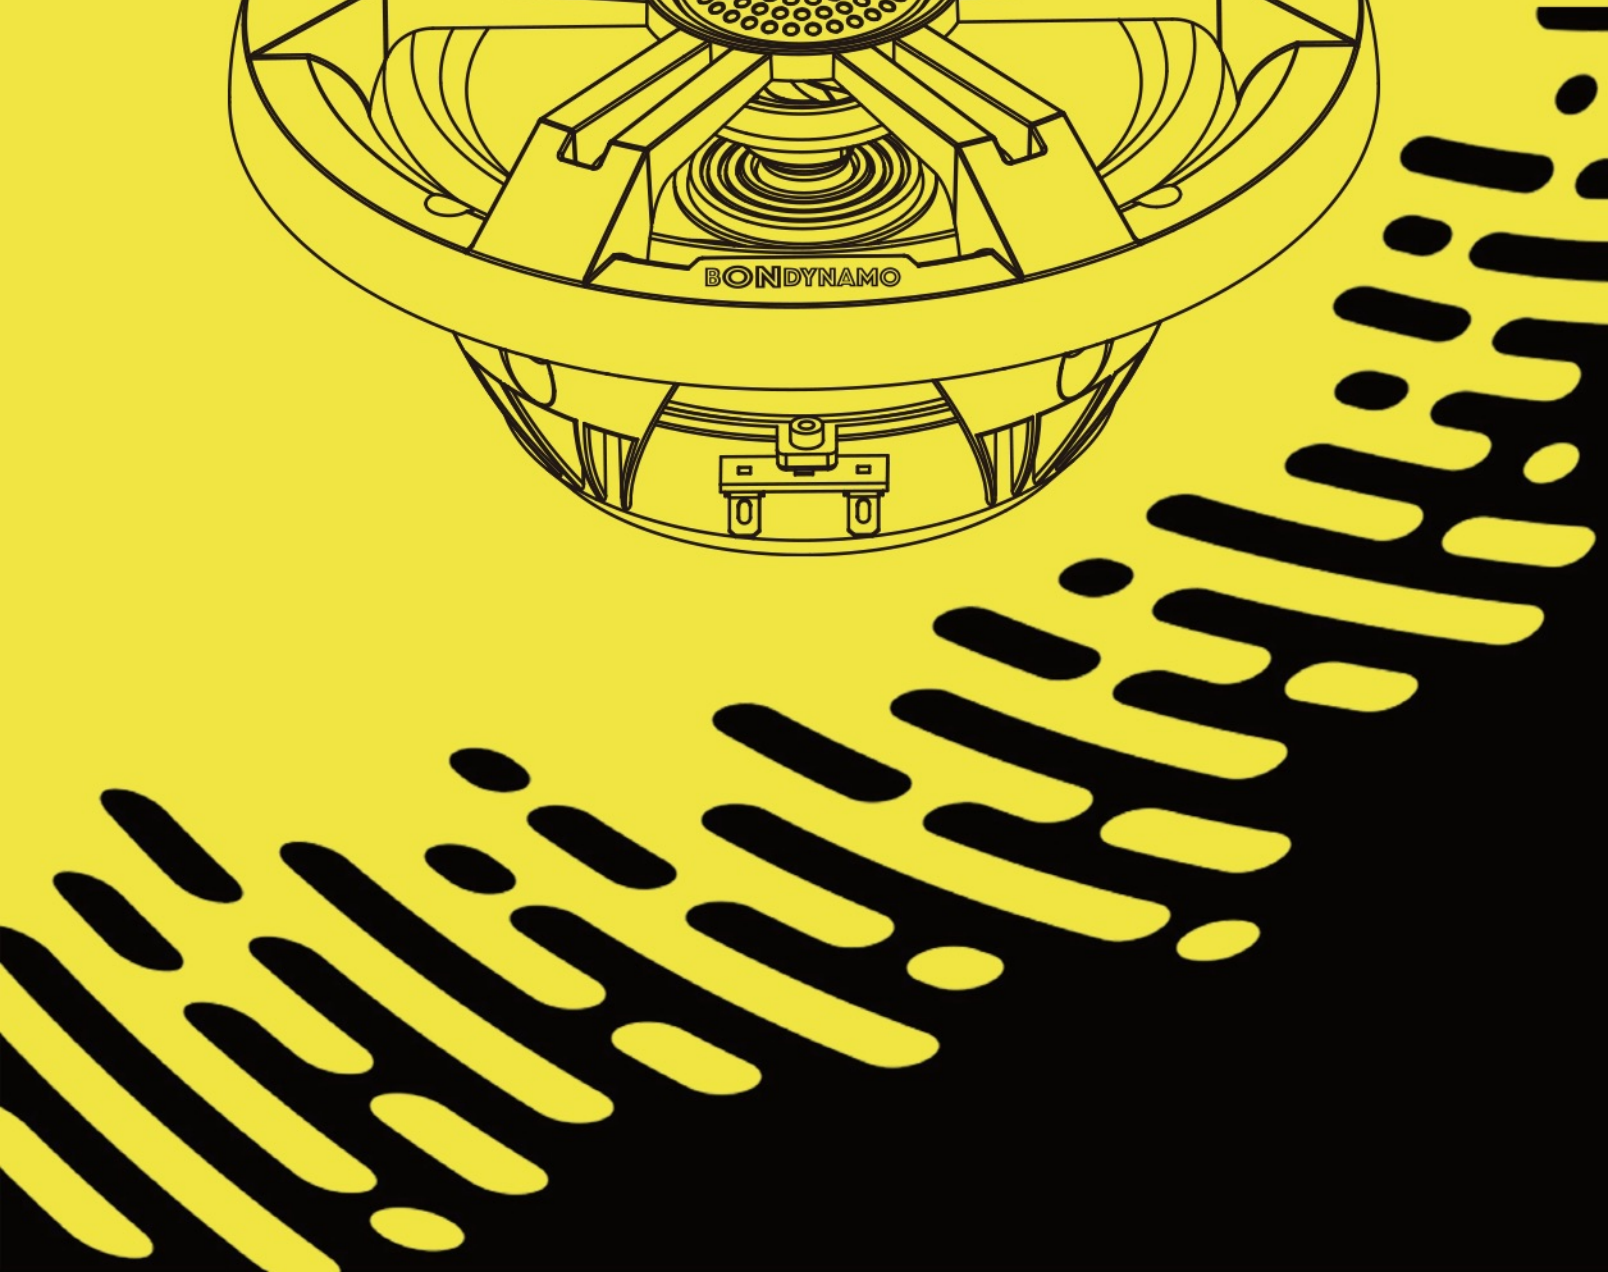


BONDYDYNAMO®

MARINE AUDIO ZONE

DESIGNED FOR THE WAVES

“WE OFFER SOLUTIONS NOT OPTIONS”

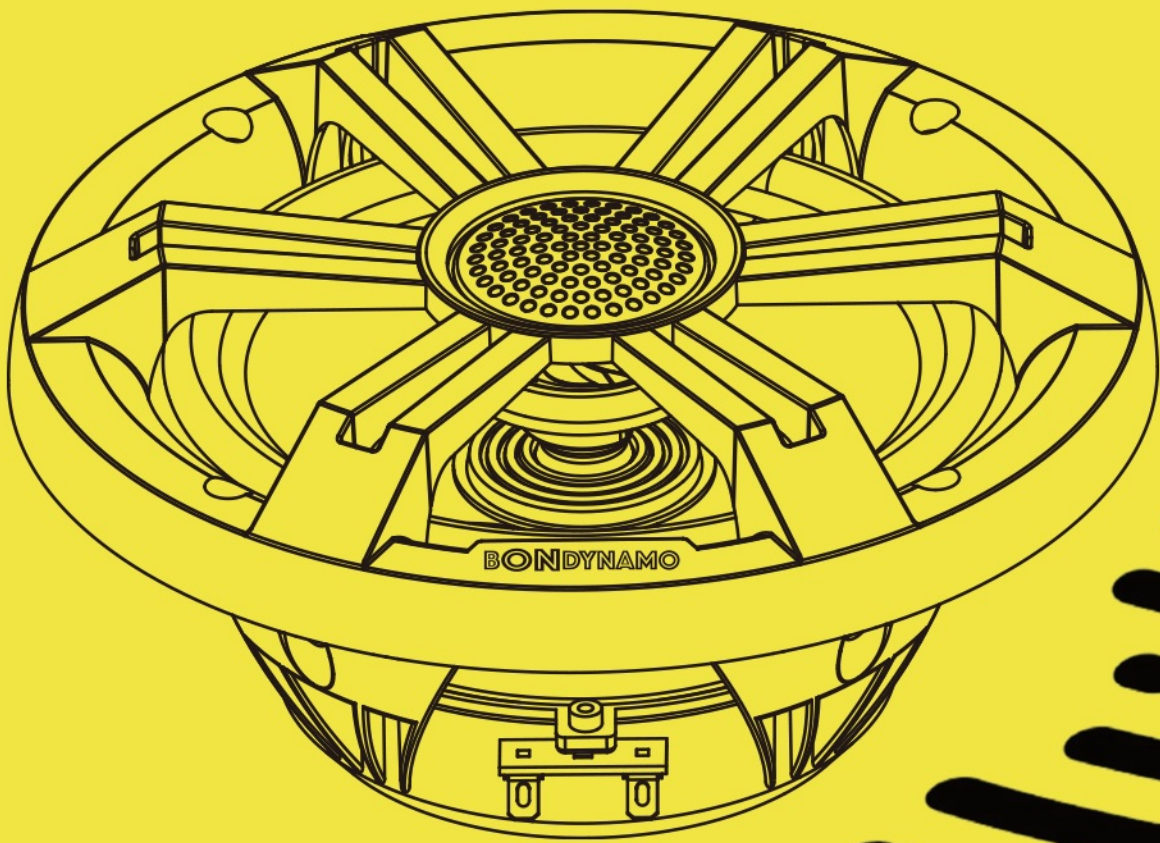

BONDYDYNAMO



BDW-MAS-200W /Marine stereo


- ✓ RCA OUT
- ✓ AM /FM RADIO
- ✓ SUBWOOFER OUT
- ✓ BLUETOOTH READY
- ✓ ANTENNA INTERFACE
- ✓ USB CHARGING @ 5 WATTS
- ✓ ANDROID / IOS COMPATIBLE
- ✓ AUX AUDIO INPUT INTERFACE
- ✓ IP 66 - DUST & WATER TIGHT
- ✓ ASTM D4329 - UV PROTECTION
- ✓ ASTM B117 - SALT PROTECTION
- ✓ REMOTE CONTROL READY
- ✓ ADD 4 + 4 OR 4 + 8 READY OPTIONAL
- ✓ EXPAND-SOUND , FLEX-AMP OPTIONAL



01



200
WATTS

INSTALLATION GUIDE

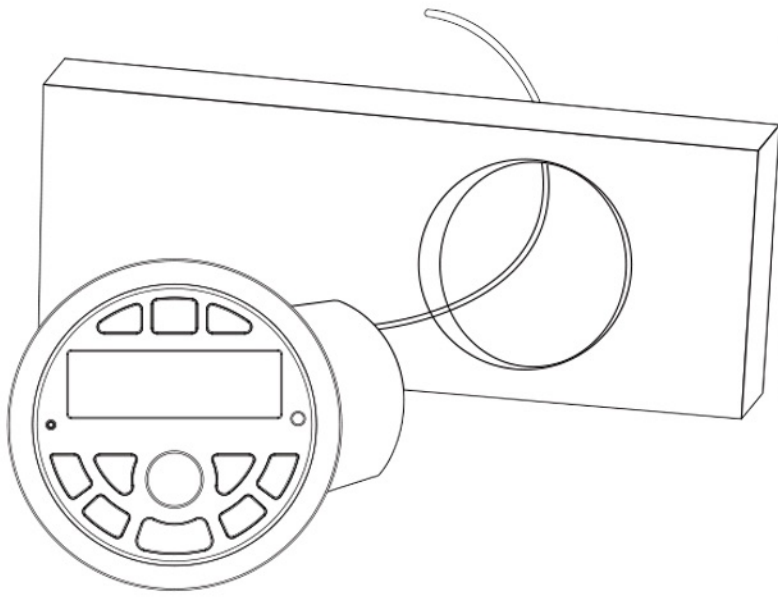


1. Drill a mounting hole with a 80 mm diameter on th panel of the yacht or vehicle, create four screw fixing holes, as shown below.

2. Four screw holes as shown on the right.

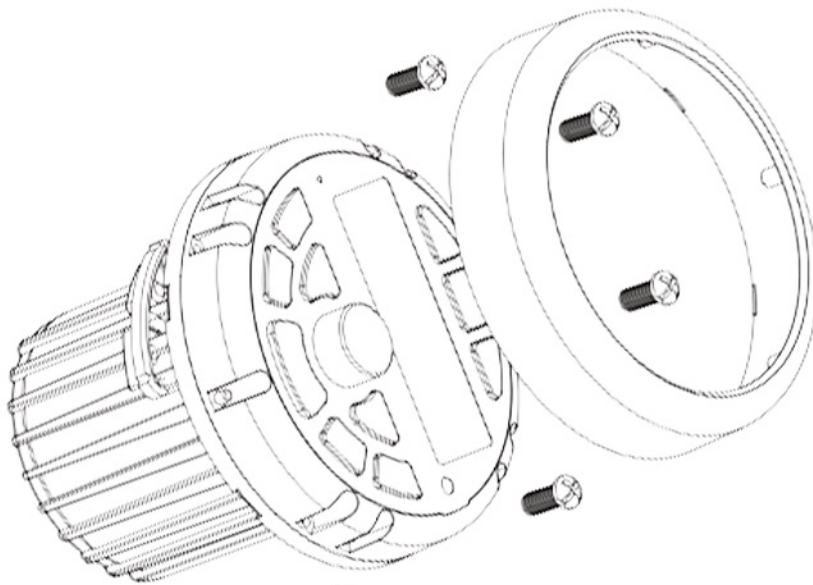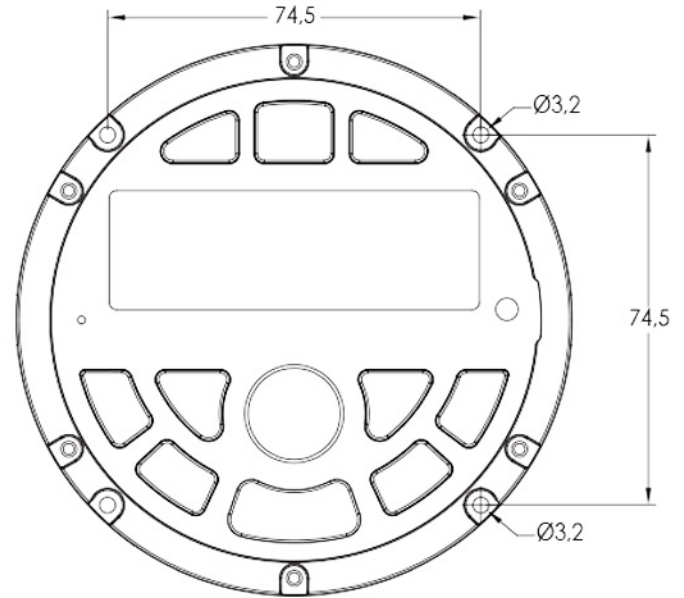

3. After tightening the screws, fasten the faceplate as shown on your left.

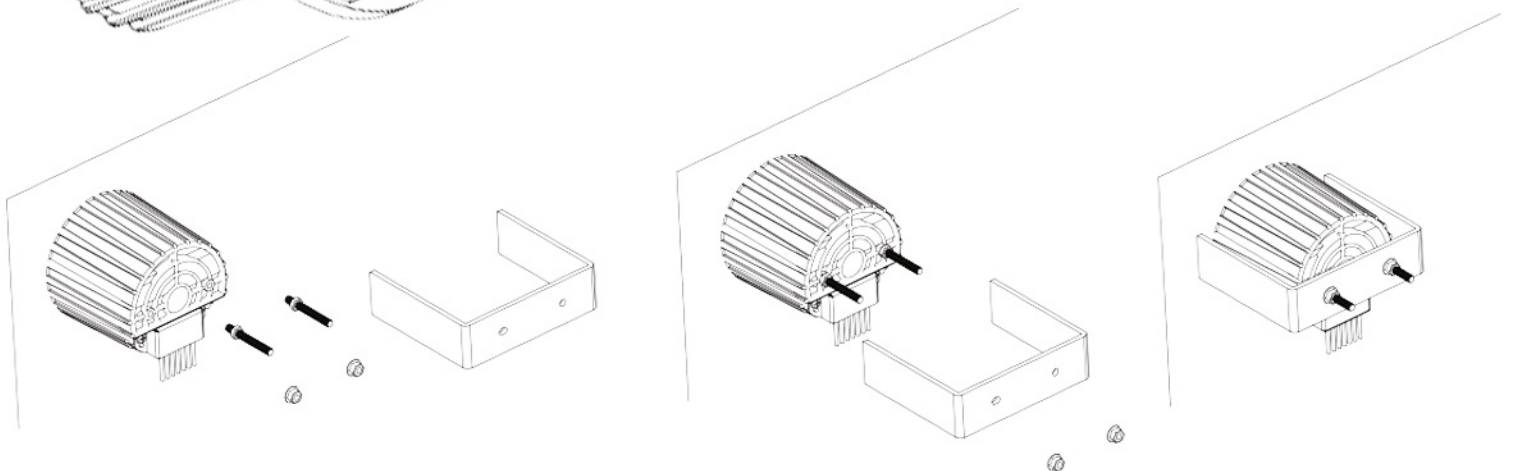

4. Secure the screws in the screw holes on the back shell of the main unit, and then install the U-shaped bracket. Tighten the nuts as shown above.

BONDYDYNAMO



BDB-MAS-200W / Marine stereo


- ✓ RCA OUT
- ✓ AM /FM RADIO
- ✓ SUBWOOFER OUT
- ✓ BLUETOOTH READY
- ✓ ANTENNA INTERFACE
- ✓ USB CHARGING @ 5 WATTS
- ✓ ANDROID / IOS COMPATIBLE
- ✓ AUX AUDIO INPUT INTERFACE
- ✓ IP 66 - DUST & WATER TIGHT
- ✓ ASTM D4329 - UV PROTECTION
- ✓ ASTM B117 - SALT PROTECTION
- ✓ REMOTE CONTROL READY
- ✓ ADD 4 + 4 OR 4 + 8 READY OPTIONAL
- ✓ EXPAND-SOUND , FLEX-AMP OPTIONAL



02



200
WATTS

INSTALLATION GUIDE

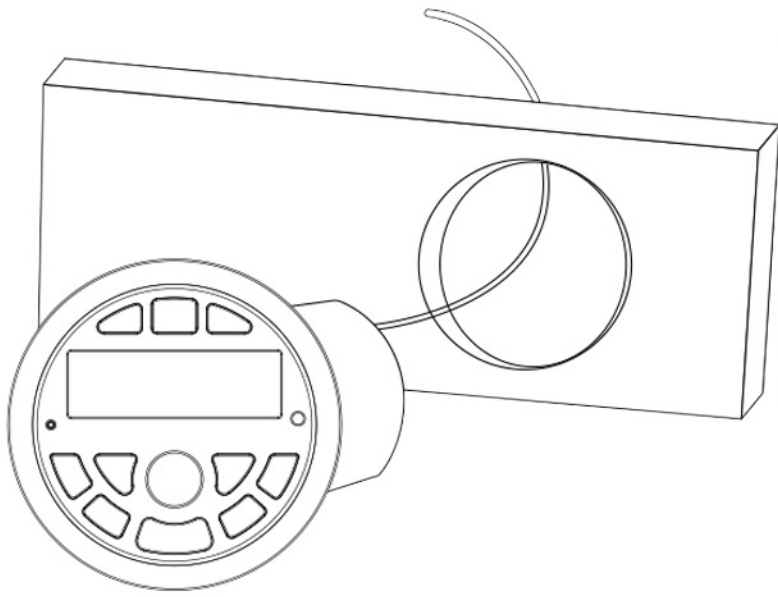


1. Drill a mounting hole with a 80 mm diameter on th panel of the yacht or vehicle, create four screw fixing holes, as shown below.

2. Four screw holes as shown on the right.

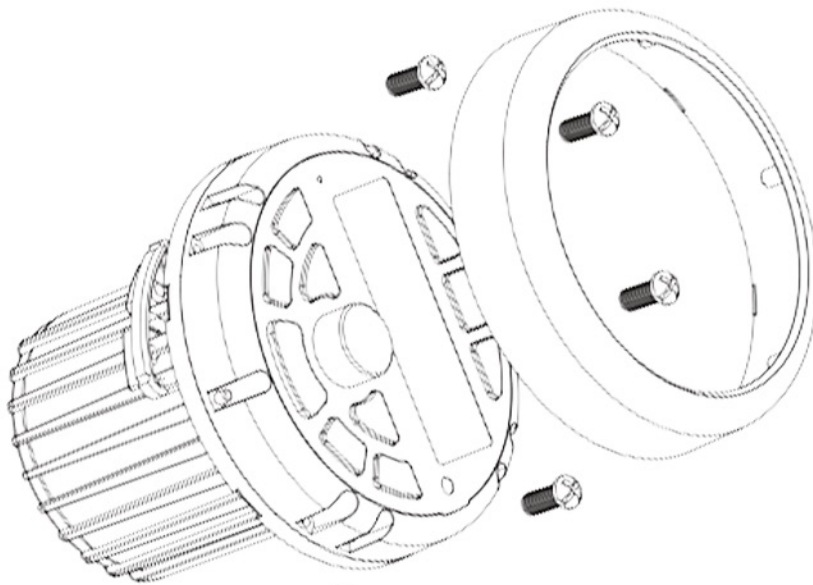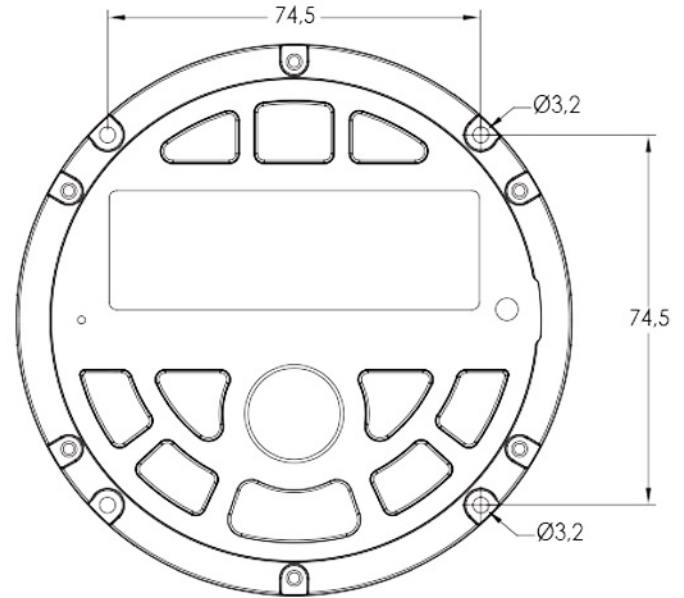

3. After tightening the screws, fasten the faceplate as shown on your left.

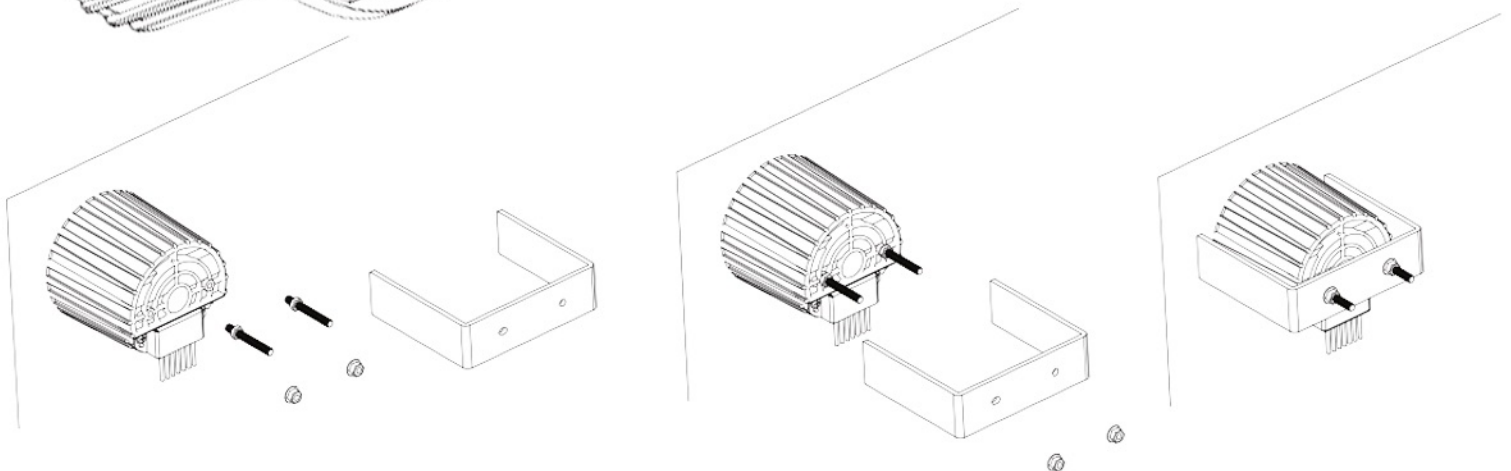

4. Secure the screws in the screw holes on the back shell of the main unit, and then install the U-shaped bracket. Tighten the nuts as shown above.

BONDYDYNAMO


**BDW-USB-PD30W-BK /
Charging & music dock**



BONDYDYNAMO

Cable length 98.0 mm, including connector

Cut out diameter 28.2 mm

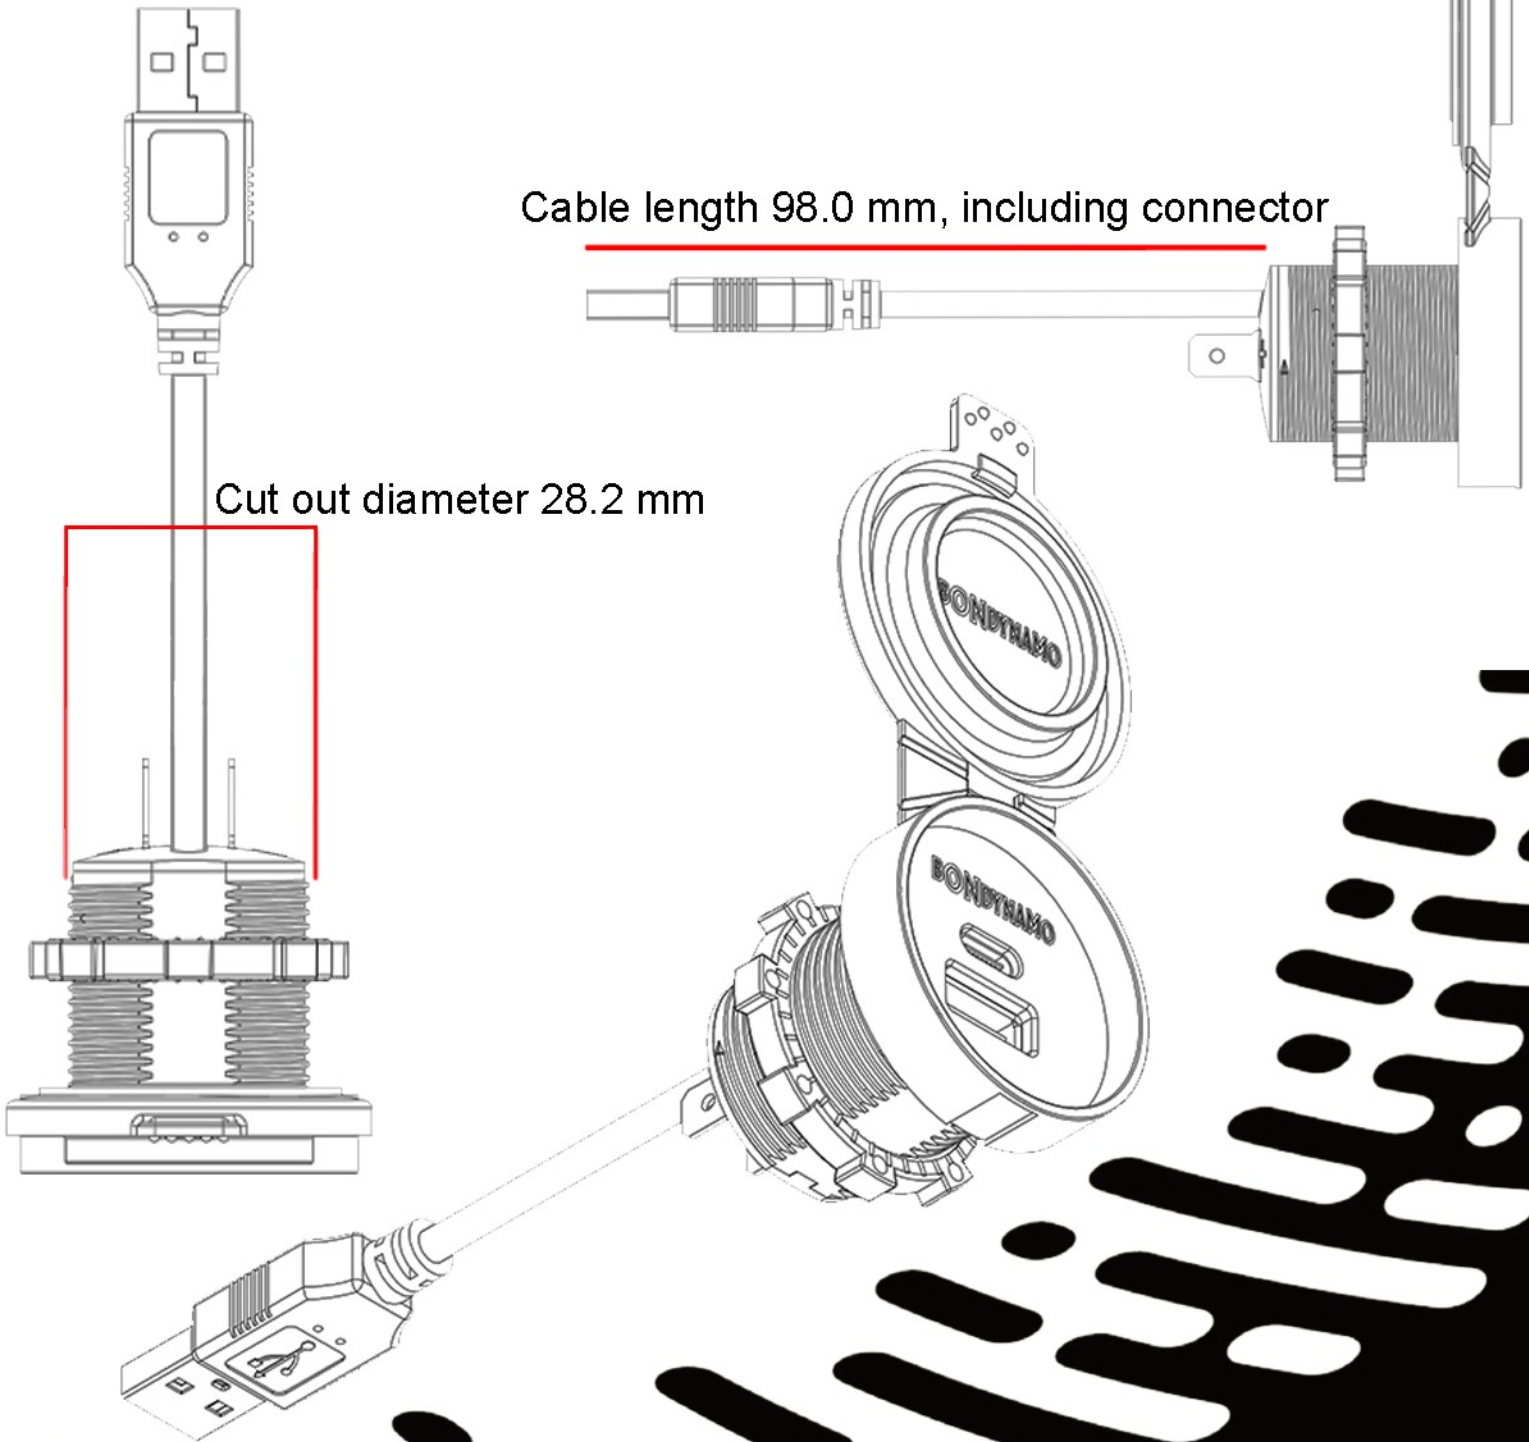


BONDYDYNAMO

BD-MS1-6.5-150W / 6.5" speakers

The tweeter can be rotated
30 degrees in all directions.

30°

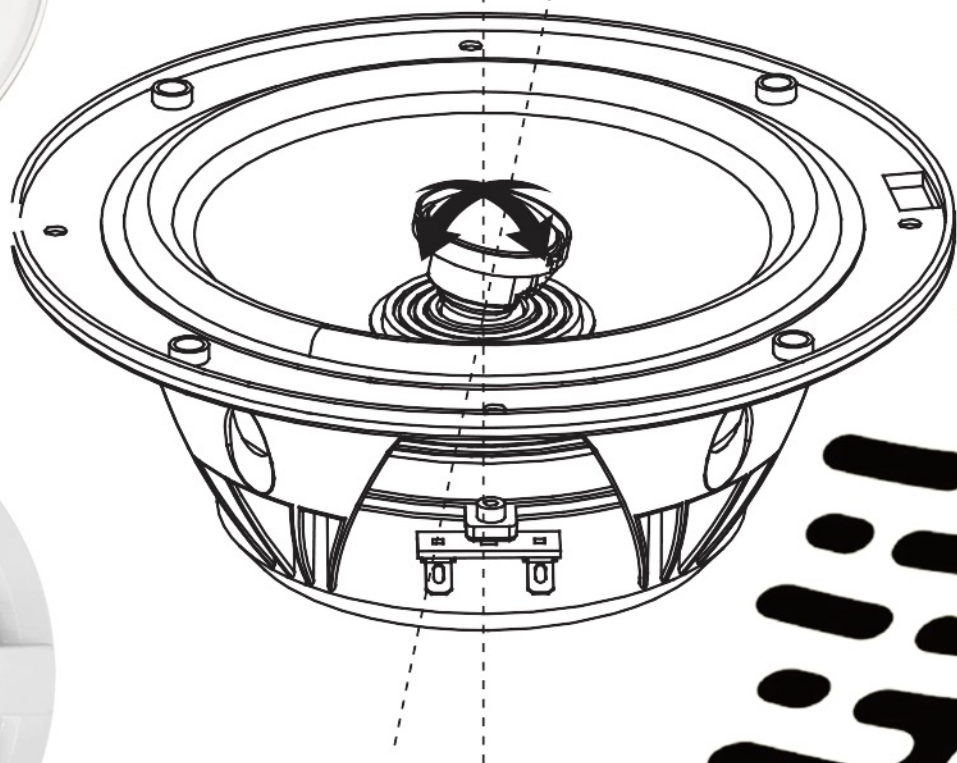

BONDYDYNAMO
6.5" 2-WAY MARINE SPEAKER
150 WATTS/4 OHM
BD-MS1




BONDDYNAMO

INSTALLATION GUIDE

MODEL: BD-MS1


- *2-Way Waterproof Marine Speakers
- *IP Rating: IP66
- *Injection Cone with Rubber Edge For High Performance
- *1" Titanium Dome Tweeter
- *Molded ABS Plastic Basket
- *Max Power: 150 Watts
- *Magnet: 10 Oz
- *Frequency Response: 60Hz-20Khz
- *Impedance: 4 Ohms
- *Sensitivity: 91 dB
- *Dimensions: D192, d142, H98, h65

Rotation Function



The tweeter can be rotated 30 degrees in all directions


1

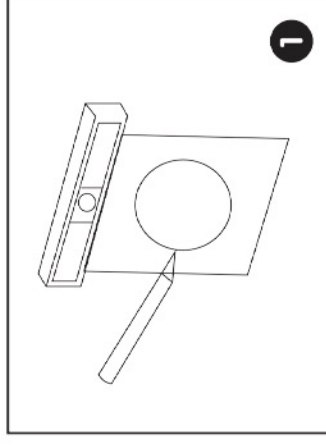

Cut the Surface.


Note: Always allow at least 1" x 1/2" or 1.5" between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.

5

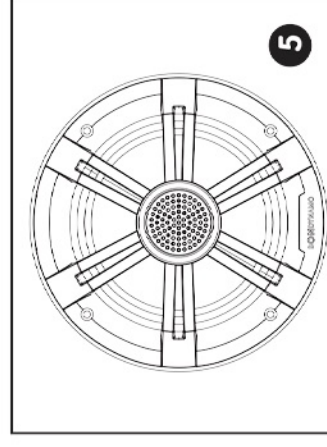


Complete.

4

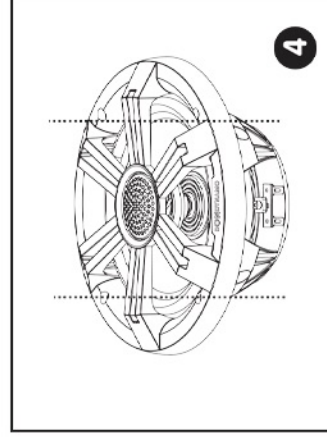


Replace the plastic grill.

3

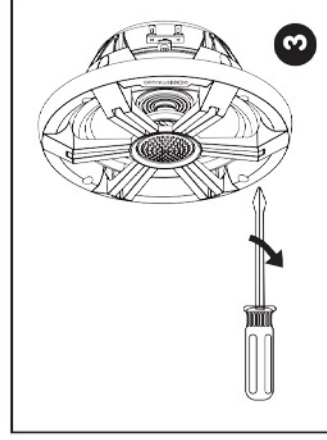

Screw down each of the four phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface. Apply the adhesive strip to secure the grill.

2

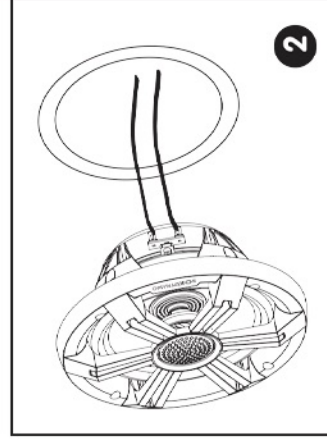


Connect the speaker wires to the speaker.

INSTALLATION GUIDE

BONDYDYNAMO

BD-MS2-4W-60W / 4" speakers

The tweeter can be rotated
30 degrees in all directions.

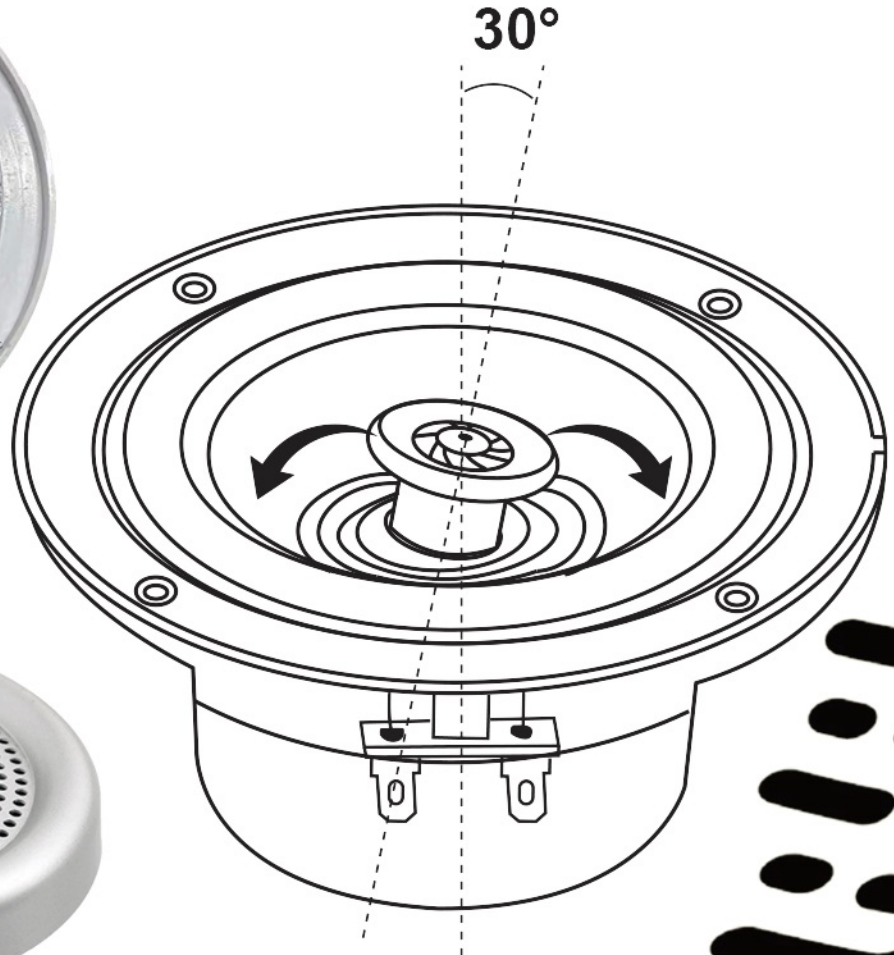

BONDDYNAMO

INSTALLATION GUIDE

MODEL: BD-MS2

*4" 2-Way Waterproof Marine Speakers

*IP Rating: IP66

*Injection Cone with Rubber Edge

For High Performance

*1/2" High Compliance Polymer Tweeter

*Molded ABS Plastic Basket

*Voice Coil: 1.0"

*Max Power: 60 Watts


*Magnet: 5.4 Oz

*Frequency Response: 60Hz-20KHz


*Impedance: 4 Ohms

*Sensitivity: 90 dB

*Dimensions: D129, d94, H70, h53.5




Rotation Function

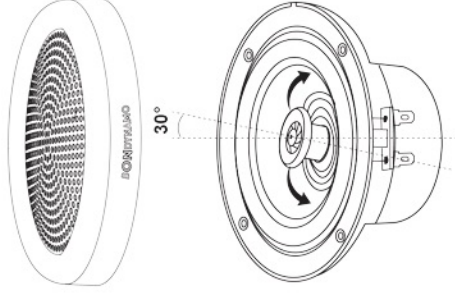


The tweeter can be rotated
30 degrees in all directions


INSTALLATION GUIDE

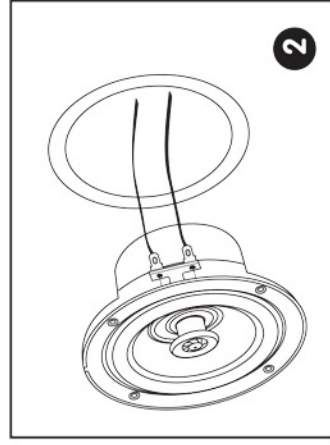


Connect the speaker wires to
the speaker.

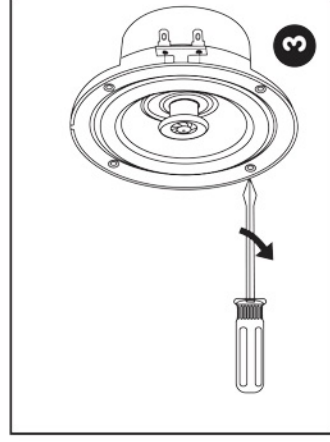

Screw down each of the four
phillips head screws. The
locking tabs will swivel into
place and secure the unit to
the rear surface. Apply the adhesive
strip to secure the grill.

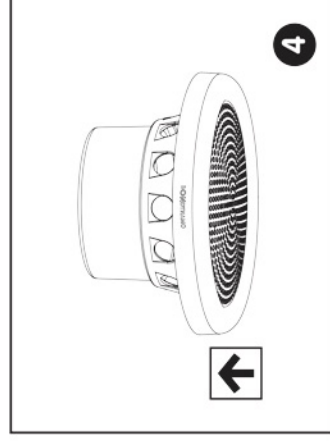


Replace the plastic grill..

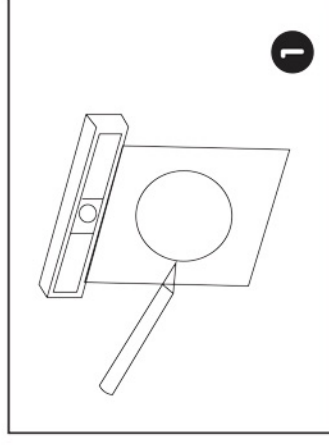

Cut the Surface.

Note: Always allow at least
1*1/2" or 1 5/8" between a wall
stud and the speaker cutout or
the locking tabs will not be able
to swivel into place.

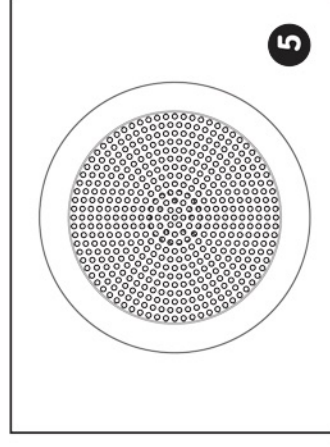

Complete.

BONDYDYNAMO

BD-ANT-WH

**Radio antenna, 2.25
meter cable.**



BONDYDYNAMO

BD-ANT-BK

**Radio antenna, 2.25
meter cable.**



BONDYDYNAMO

HIGH PERFORMANCE - MARINE SPEAKER CABLE.

- Stranding: Dual core, 16/0.25 BC LHL - 16/0.25 TC LHL
- Inner Insulation: PE clear, Transparent Jacket, OD 2.1 mm
- Outer Insulation: PVC clear, Transparent Jacket, OD 4.4*8.8 mm

18
AWG

100 MTR
328 FT

-20 °C ~ 80 °C

BARE
COPPER

TINNED
COPPER

PE
PVC

OFC
COPPER

FCC

Rohs

CE
CERTIFIED

**BD-SW-18AWG-DC /
100 meter roll, 328 feet,
double jacket speaker wire.**



BONDYDYNAMO

HIGH PERFORMANCE - MARINE SPEAKER / ELECTRICAL CABLE.

- Stranding: Dual core, 48/0.19 TC LHL - 48/0.19 TC LHL
- Inner Insulation: PVC red/black, Semi Transparent Jacket, OD 2.9 mm
- Outer Insulation: PVC yellow, Solid Jacket, OD 4.5*7.4 mm

16
AWG

100 MTR
328 FT

105°C DRY
75°C WET

VW-1

UL1426
BC5W2

600V


OFC
COPPER

FCC

Rohs

CE
CERTIFIED

**BD-SW-16AWG-HDDC /
100 meter roll, 328 feet,
double jacket dual core
speaker & electrical wire.**

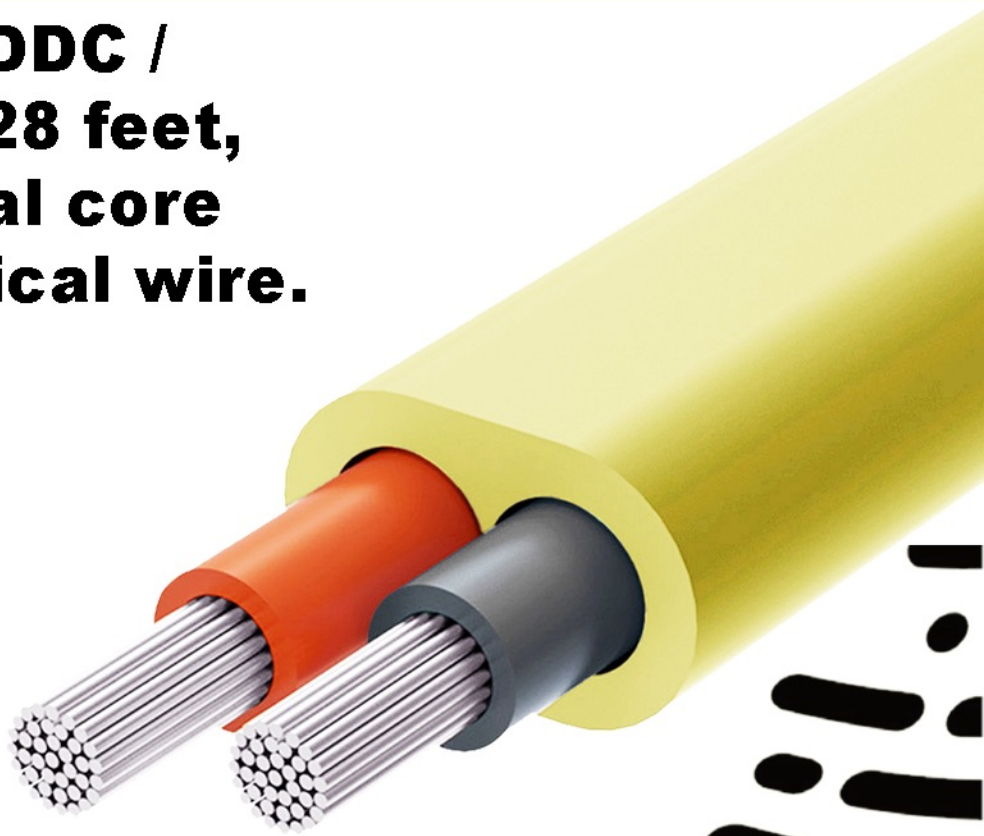

BONDYDYNAMO

BD-SG-001 / WHITE

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-002 / RED

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-003 / BLUE

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-004 / WHITE

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-005 / WHITE

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-006 / YELLOW

Speaker grill for all BD-MS1 6.5" speakers.



BONDYDYNAMO

BD-SG-007 / BLACK

Speaker grill for all BD-MS2 4" speakers.



BONDYDYNAMO

BD-SG-008 / WHITE


Speaker grill for all BD-MS2 4" speakers.



BONDYDYNAMO®



BDDST01-CLEAR-ST
BDDST02-CLEAR-ST

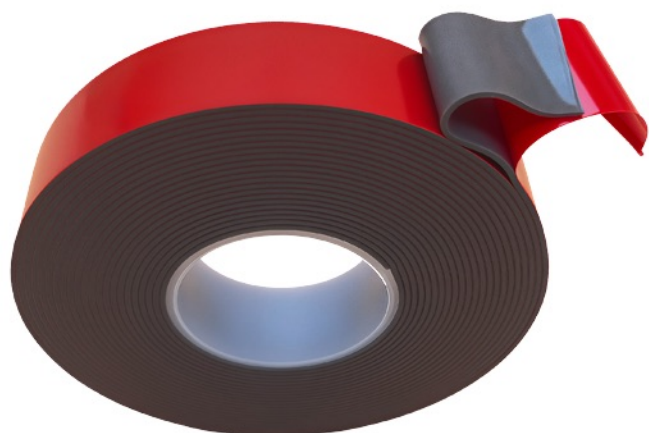

BDDST03-GREY-DY
BDDST04-GREY-ST
BDDST05-GREY-DY
BDDST06-GREY-ST
BDDST07-GREY-DY
BDDST08-GREY-ST
BDDST09-GREY-ST
BDDST10-GREY-DY
BDDST11-GREY-DY





BDDST12-GREY-ST



BDDST13-GREY-ST



BDDST14-GREY-ST
BDDST15-GREY-ST



MATERIALS :

- Carrier : Acrylic Foam
- Release Film : Red or Clear PE
- Adhesive : PSA (Pressure-Sensitive Adhesive)

KEY FEATURES :

- Resistant to moisture, UV light, solvents, and temperature fluctuations.
- Highly suitable for mounting various objects, with strong adhesion to metal, glass, and most plastics.
- Double-sided, 100% high-strength acrylic tape, suitable for heavy-duty bonding and high-load bearing applications.
- Resilient for both indoor and outdoor use. It replaces screws, blind rivets, welds, and liquids. It is often used in industries such as automotive, marine, electronics, construction, and signage. "BONDYNAMO - BDDST" Tape is a double-sided, pressure-sensitive adhesive tape from the Bondynamo product line. It is designed for projects that require strong bonding on a variety of surfaces. The "BDDST" series is known for its ability to create a perpetual bond. Unveiling our proven, superior acrylic foam tape designed for innovative, effortless bonding solutions. These tested products offer trusted strength and durability, making them perfect for demanding applications where a secure and reliable hold is critical. With its customizable thickness and safe, long-lasting adhesion, this tape assures results-driven performance across various surfaces. Take advantage of this exclusive, high-performance solution that offers EXTREME bonding, ensuring a perfect fit for your project needs.

NOTE : "BDDST tapes are not your typical double-sided tapes. They are highly versatile & designed to deliver superior **STATIC & DYNAMIC** strength, making them stronger & more reliable than other tapes on the market."

Art. No.	Width	Length	Color	Thickness	Adhesive Strength	Application Temperature	
BDDST01	10 mm	5 m	Clear-ST	0.50 mm	30 min: ≥ 33.02 N/25.4mm 72 hrs : ≥ 66.04 N/25.4mm	- 40°C to 93°C	BDDST12-Grey-ST L : 50 mm W : 30 mm T : 1.1 mm
BDDST02	20 mm	5 m	Clear-ST	1.00 mm	30 min: ≥ 35.56 N/25.4mm 72 hrs : ≥ 68.58 N/25.4mm	- 40°C to 93°C	
BDDST03	20 mm	5 m	Grey-DY	0.40 mm	30 min: ≥ 38.10 N/25.4mm 72 hrs : ≥ 76.20 N/25.4mm	- 40°C to 93°C	
BDDST04	10 mm	5 m	Grey-ST	0.60 mm	30 min: ≥ 35.56 N/25.4mm 72 hrs : ≥ 76.20 N/25.4mm	- 40°C to 93°C	BDDST13-Grey-ST L : 55 mm W : 10 mm T : 1.1 mm
BDDST05	20 mm	5 m	Grey-DY	0.60 mm	30 min: ≥ 40.64 N/25.4mm 72 hrs : ≥ 81.28 N/25.4mm	- 40°C to 93°C	
BDDST06	10 mm	5 m	Grey-ST	0.80 mm	30 min: ≥ 38.10 N/25.4mm 72 hrs : ≥ 81.28 N/25.4mm	- 40°C to 93°C	
BDDST07	20 mm	5 m	Grey-DY	0.80 mm	30 min: ≥ 45.72 N/25.4mm 72 hrs : ≥ 88.90 N/25.4mm	- 40°C to 93°C	BDDST14-Grey-ST DIA : 40 mm T : 1.1 mm
BDDST08	10 mm	5 m	Grey-ST	1.10 mm	30 min: ≥ 38.10 N/25.4mm 72 hrs : ≥ 88.90 N/25.4mm	- 40°C to 93°C	
BDDST09	20 mm	5 m	Grey-ST	1.10 mm	30 min: ≥ 38.10 N/25.4mm 72 hrs : ≥ 88.90 N/25.4mm	- 40°C to 93°C	
BDDST10	10 mm	5 m	Grey-DY	1.10 mm	30 min: ≥ 50.80 N/25.4mm 72 hrs : ≥ 96.52 N/25.4mm	- 40°C to 93°C	BDDST15-Grey-ST DIA : 30 mm T : 1.1 mm
BDDST11	20 mm	5 m	Grey-DY	1.10 mm	30 min: ≥ 50.80 N/25.4mm 72 hrs : ≥ 96.52 N/25.4mm	- 40°C to 93°C	

Installation guide :


- Tools & Materials Needed : Double-sided acrylic tape • Scissors / cutting tool • Rubbing alcohol or a mild cleaner
- Clean cloth or lint-free towel • Object to be mounted or attached • Surface for bonding (wall, glass, metal, etc.)
- Surface preparation : Clean and dry the surfaces you want to bond using rubbing alcohol or a mild cleaner to remove dirt, grease, and dust. Allow the surfaces to dry completely. Avoid textured or uneven surfaces, Double-sided acrylic tapes work best on smooth, flat surfaces like glass, metal, plastic, tiles and some painted walls.

BONDYDYNAMO

BD786-SW19-RL/B-10A-316-12/24-IP66

BD786M-SW19-RL/B-10A-316-12/24-IP66

- * SIZE - 19 MM
- * DESIGN - RING LED
- * LED - COLOR BLUE
- * CURRENT - 10A
- * FUNCTION - LATCHING OR MOMENTARY
- * MATERIAL - 316 SS & PVC
- * VOLTAGE - 12/24 VDC COMPATIBLE
- * INGRESS PROTECTION - IP66

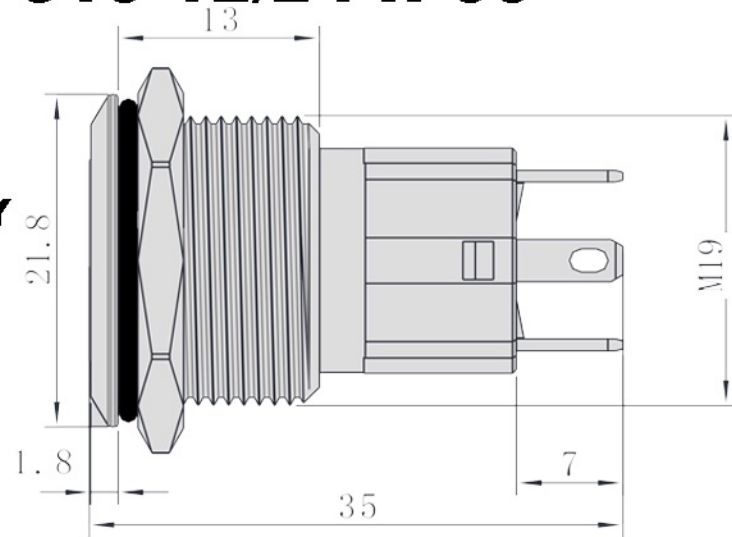

WIRE LENGTH - 16 CM

**BLACK - INPUT +
BLACK - OUTPUT +**

RED - LED +

WHITE - LED -




19



BONDYDYNAMO

BD007-SW19-RLR/B-20A-RST-316-12/24-IP67

- * SIZE - 19 MM**
- * DESIGN - RING LED**
- * LED - DUAL COLOR OPTION RED/BLUE**
- * FUNCTION - LATCHING**
- * CURRENT - 20A / RESETTING**
- * MATERIAL - 316 STAINLESS STEEL / PVC**
- * VOLTAGE - 12/24 VDC COMPATIBLE**
- * INGRESS PROTECTION - IP67**

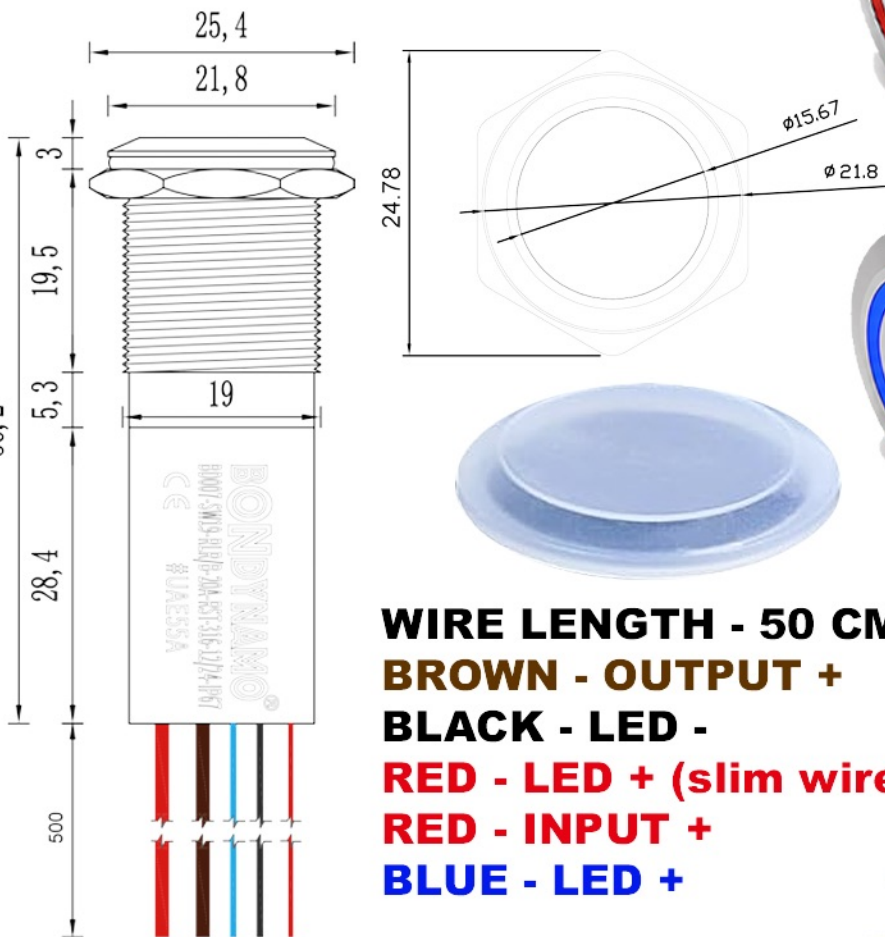

WIRE LENGTH - 50 CM

BROWN - OUTPUT +

BLACK - LED -

RED - LED + (slim wire)

RED - INPUT +

BLUE - LED +

BONDYDYNAMO

BD-19SC / CLEAR SILICONE COVER
for all 19mm switches.



BONDYDYNAMO

BD-NAV-RG-IP66-BK

BD-NAV-RG-IP66-WH

- * **Compatibility** - sailboats or power boats up to 20 Mtr.
- * **Dimensions** - 98mm (L) x 55mm (W) x 35mm (H)
- * **Material** : PA & PC
- * **Voltage** -12/24 volts DC
- * **Beam angle** 90°
- * **Watts** - 1W @ 12 vdc / 3.1W @ 24 vdc
- * **IP rating** - IP66
- * **LED color** - Red/Green
- * **Housing color** - Black/White
- * **IP rating** - IP66



BONDYDYNAMO®

TO THE WORLD



www.bondynamo.com